



***Get 20% off ***
by joining my exclusive VIP group
>>> http://eepurl.com/gjqQT5

FABRIC REQUIREMENTS::

Front: Cut 1 – 4.5" x 4.5" (12 cm x 12 cm) Back: Cut 1 – 4.5" x 4.5" (12 cm x 12 cm) (.4mm cork fabric was used for the samples)

INSTRUCTIONS:

1. Hoop washaway stabilizer in the hoop. We used 1 layer in the sample.

2. Load design into your machine using the correct format.

3. Stitch the placement line and remove hoop from the machine.


4. Place the front fabric in the hoop, covering the placement line. We used 505 spray glue, sprayed lightly on the back of the cork to hold it temporarily in place. (use your preferred method of tape or pins instead if you wish)

5. Stitch the tackdown stitch to hold the fabric in place. Remove tape or pins if necessary



- 6. Stitch the design in your preferred colours.
- 7. Remove hoop from machine. Glue tack or tack backing in place.
- 8. Stitch the tackdown line and remove hoop from the machine.

9. Trim close to tackdown stitching, front and back, being careful to not snip the threads.

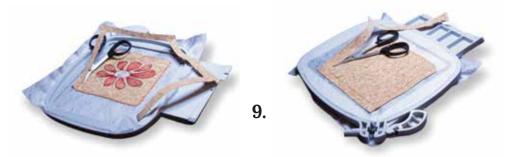

- 10. Change the bobbin thread to match the top thread.
- 11. Place back on the machine and stitch the next step. Check to make sure all the edges are covered.
- 12. Return to the machine and stitch the edging stitches.
- 13. Remove from the machine and take out of hoop



14. Trim the backing close to the edge, being careful to not nick the edging stitches.

- 15. Run a wet cloth along the edge of the water soluble backing to remove.
- 16. Your in-the-hoop coaster is complete.



